


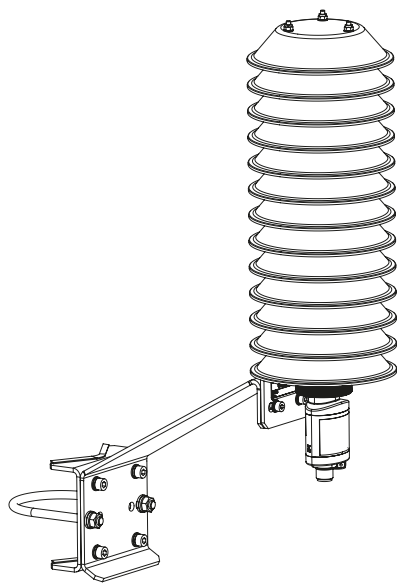

Vaisala Radiation Shield Series DTR500 are solar radiation and precipitation shields supporting humidity probe installations in outdoor applications.

Sensor protection

The maintenance-free DTR500 series shields protect the humidity and temperature sensors from solar radiation and precipitation. They provide excellent ventilation while blocking both direct and reflected solar radiation.

The special plastic used in the plates has excellent thermal characteristics: the white outer surface reflects radiation, and the black inside absorbs accumulated heat. The shields can be easily installed on a vertical pole, horizontal beam, or flat surface.

The DTR shields can be used with the following Vaisala products:

Features

- Protection for temperature and humidity probes from scattered and direct solar radiation and rain
- Maintenance-free
- Naturally ventilated
- UV-protective
- Easy to install on a vertical pole, horizontal beam, or flat surface
- Suitable for a wide selection of applications
- Choice of shields and mounting accessories

DTR503(A)

Vaisala HUMICAP® Humidity and Temperature Probe HMP155

DTR504(A)

Vaisala HUMICAP® Humidity and Temperature Transmitters HMT120/130

Vaisala HUMICAP® Humidity and Temperature Probe HMP110

Vaisala INTERCAP® Humidity and Temperature Probe HMP60

DTR504, DTR503, and DTR502 are compact radiation shields (suitable for HMP155 without additional T-probe). They can be mounted on a horizontal 40 x 40 mm beam.

DTR504A, DTR503A, DTR502B, and DTR502A are compact radiation shields with mounting arm for installation on Ø 104 or Ø 60 mm vertical poles. They can be mounted on a wall with a mounting arm.

DTR502(A) with adapter 221072

Vaisala HUMICAP® Humidity and Temperature Probe HMP155's additional temperature sensor

DTR502B

Vaisala HUMICAP® Humidity and Temperature Transmitters HMT333, HMT337, HMT373, and HMT377


Vaisala HUMICAP® Humidity and Temperature Probes HMP3 and HMP7

Vaisala Combined Pressure, Humidity and Temperature Transmitters PTU303 and PTU307

Technical data

DTR502B for HMT333, HMT337, HMT373, HMT377, HMP3, HMP7, PTU303, and PTU307


Dimensions (H × W)	195 × 105 mm (7.68 × 4.13 in)
Accessories	Product specific adapter

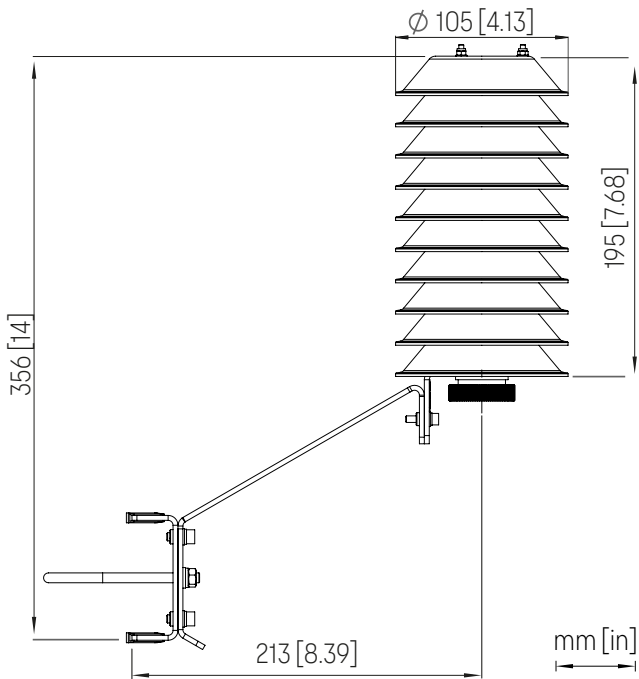

DTR502B dimensions

DTR504 for HMT120/130 remote probes, HMP110, and HMP60


Dimensions (H × W)	141 × 105 mm (5.55 × 4.13 in)
Accessories	Horizontal beam assembly Pole mast installation kit

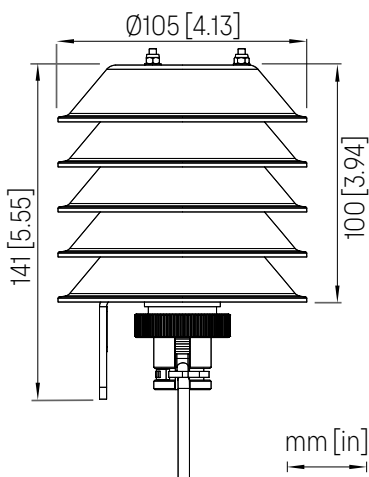

DTR504 dimensions

DTR503A for HMP155

Dimensions (H × W)	252 × 105 mm (9.92 × 4.13 in)
Accessories	Horizontal beam assembly Pole mast installation kit

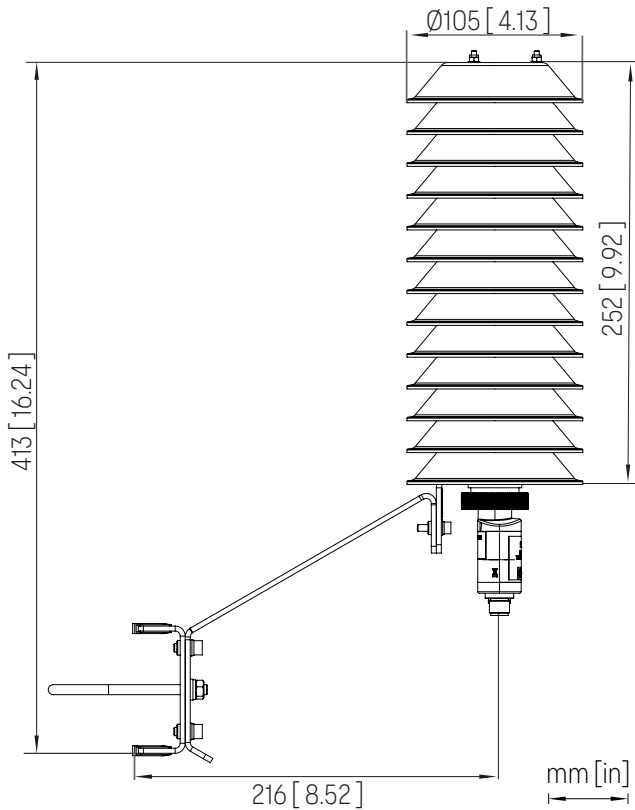

DTR503A dimensions